

# Helios | CLEAR

Engineered to Thrive in Australia

## 5 Design Decisions to Make a Difference

1

HJT Hybrid Cells with 0 Busbar technology provide increased light absorption and enhanced aesthetics

2

More Power Per Panel:  
Up to 22.02% Efficiency for maximum savings

3

Transparent Dual Glass Design for Enhanced Durability

4

More Power for Decades with Lower Degradation

5

More Warranted Power for your Solar Investment:



30 Year Product Warranty\*



30 Year Performance Warranty



440W | Dual Glass Transparent Bi-Facial N.HJT OBB

# Helios | CLEAR

## 1 Five Layers for Harvesting More Energy

Heterojunction solar cells use a three-layered structure to harvest more. One crystalline N-type silicon wafer is surrounded by two thin amorphous silicon layers, which we then protect with two layers of toughened glass. This design boosts **efficiency up to 22.02%** by capturing at each layer. The top layer harvests bonus sunlight before it reaches the crystalline layer, and the lower layer absorbs any light that passes through.

The Helios CLEAR cells now feature advanced **zero busbar (0BB) technology**, eliminating shading losses caused by traditional busbars and reducing electrical resistance. This upgrade enhances power output, improves reliability, and delivers a cleaner aesthetic with an uninterrupted cell surface.

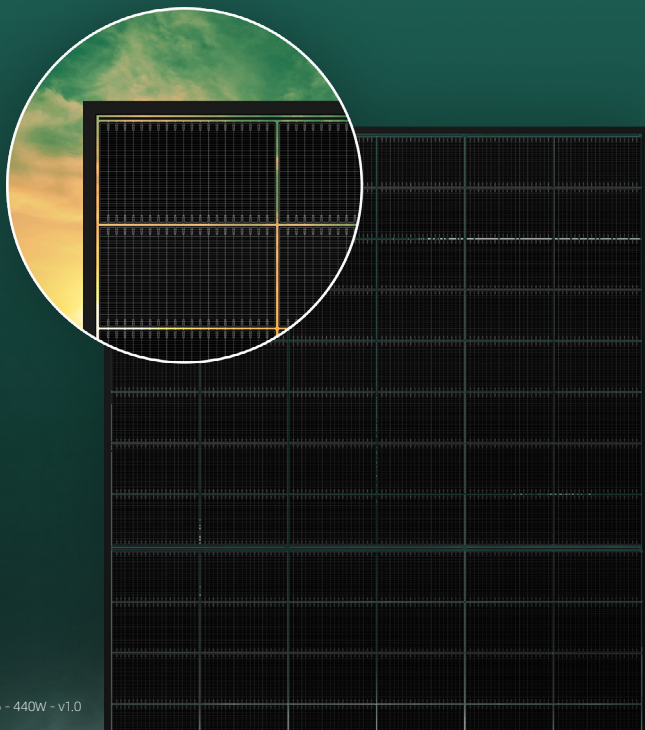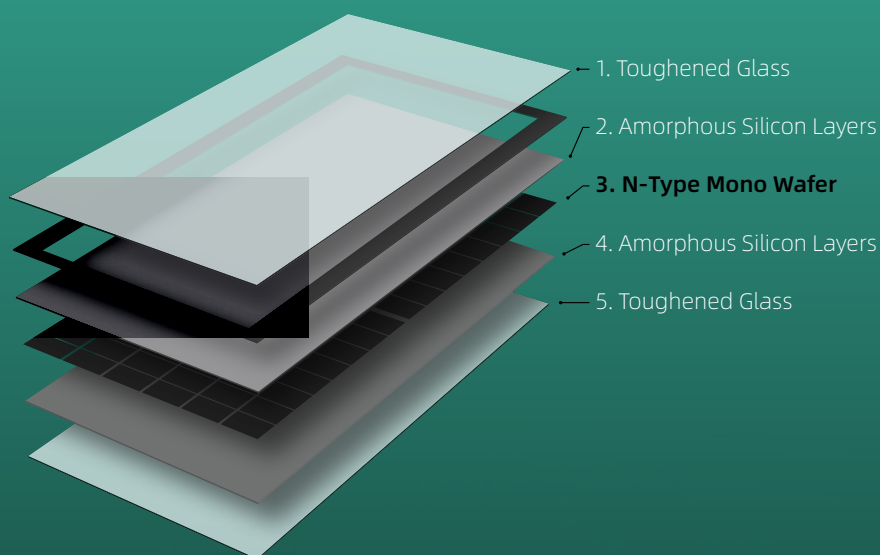

2

## Higher Power Density at the Hottest Times

- **4% MORE** Power than PERC (*standard cell technology*)
- HJT Cells have world leading efficiency
- Outstanding power temperature coefficient of **-0.24%/ °C** provides greater performance in hotter conditions


3

## Transparent Dual Glass Design

Solar Panels have a major warranty issue in Australia because plastic solar panel backsheets degrade.

Dual Glass replaces the plastic backsheet with **glass to last longer**.

Phono were Pioneers in Engineering Dual Glass Design for Australian homes.

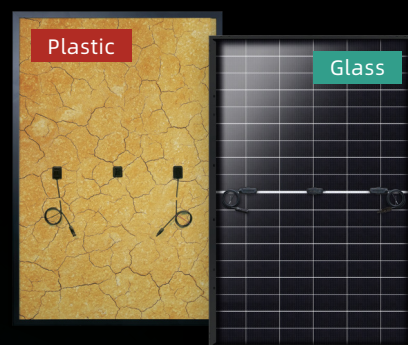

4

## More Power for Decades with Lower Degradation

- 30-year linear performance warranty to 88.8% at year 30

5

## Warranty



**30 Year**  
Product  
Warranty\*



**30 Year**  
Performance  
Warranty

# Make a secure investment

Electrifying your Australian home with solar is critical to reducing your power bills and achieving green goals as a nation.

From Manufacturer to installer, we are invested in your secure solar future. Sumec is guaranteeing this longevity with 30 year manufacturer warranties.

## 4 Layers of protection



## Engineered for Australian Conditions

80% of Australians live close to the coast and solar modules for Australia need to be engineered for varying harsh conditions.



### Salt Mist Certification

Rigorously tested to withstand harsh, salty environments



### Cyclone Tested

Rated for strong Wind Regions like NT




### Increased Hail Testing


For increased resilience

## Dual Glass & Bifacial Technology

Bifacial solar panels absorb power from the front and the back of the solar panel. Up to **25% more power yield** can be gained in optimal install conditions.

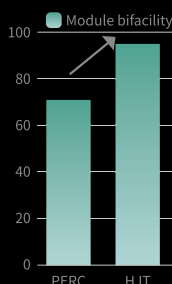

### Higher Bifaciality Performance with HJT



Power generation increased further by 3 - 6% with HJT compared to previous Bifacial PERC Technology.



## Electrical Typical Values

Model	PS440L14GFH-16/QSH	
Testing Condition	STC	NOCT
Rated Power (Pmpp)	440	337
Rated Current (Impp)	14.49	11.59
Rated Voltage (Vmpp)	30.37	29.08
Short Circuit Current (Isc)	15.19	12.15
Open Circuit Voltage (Voc)	36.18	34.66
Module Efficiency (%)	22.02	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, AM 1.5, Cell Temperature 25°C. NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s. Made in China. Measurement Tolerance at STC: Pmax±3%, Voc±3% and Isc±5%

## BSTC

Maximum Power (Pmax)	490
Optimum Operating Current (Impp)	16.1
Optimum Operating Voltage (Vmpp)	30.47
Short Circuit Current (Isc)	16.94
Open Circuit Voltage (Voc)	36.31

BSTC: Front Side Irradiation 1000W/m<sup>2</sup>, Back Side Reflection Irradiation 135W/m<sup>2</sup>, AM 1.5, Ambient Temperature 25°C

## Mechanical Characteristics

Cell Type	HJT Monocrystalline
Dimension (L × W × H)	Length: 1762mm
	Width: 1134mm
	Height: 30mm
Weight	22.0kg
Glass	1.6mm/1.6mm toughened glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	1100mm
Junction Box	IP 68 Rated
Connectors	Staubli EV02


## Temperature Ratings

Voltage Temperature Coefficient	-0.22%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.24%/°C
Power Tolerance	0~+3%
NOCT	44±2°C
Bifaciality	90±5%



## Absolute Maximum Rating

Operating Temperature	From -40 to +85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	Class II
Maximum System Voltage	DC 1500V


## Packing Configuration

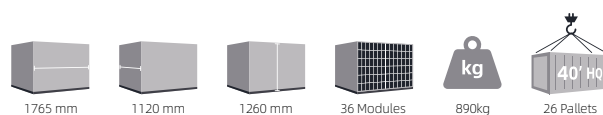


## Electrical Characteristics

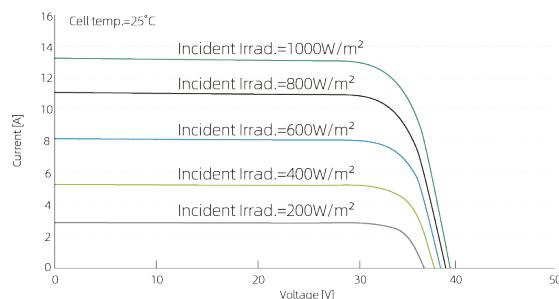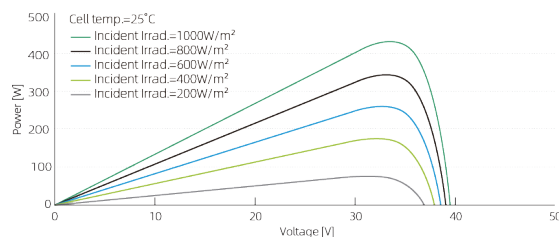

## Panel Dimensions

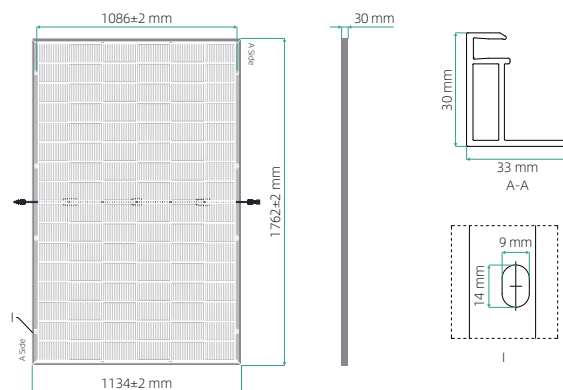

## Linear Performance Warranty

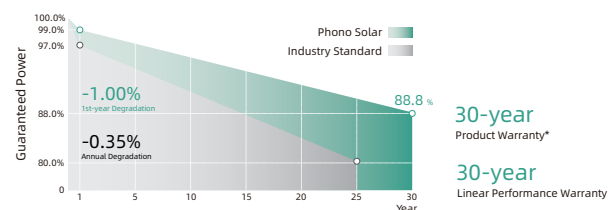

30-year linear performance warranty to 88.8% at year 30. This amounts to 1% degradation in the first year, 0.35% annually. | \*30 year Product Warranty applies to Residential System Installations. Commercial System Installations are eligible for 25 year Product Warranty. Please see our warranty document for full terms, conditions and details.